

Washer-dryer combo AWDA035




Model No.		AWDA035	
Load Capacity Guide	Bed Sheet (Single)	18	
	Lab Coat / Uniform	35	
	Shirt	64	
	Pajamas	29	
	Washcloth	700	
	Blanket	5	
Capacity(kg)		35/24	35.2/15
Washer extractor/Tumble dryer			
Control Interface		Touchscreen	Touchscreen
Drum Dimensions		890 Ø × 566mm	890 Ø × 566mm
Drum Speed	Wash (rpm)	20 - 50	
	Extract (rpm)	100 - 800	
Electrical Requirement	AC415V/50-60Hz/3Ph	50	20
OCPD Rating (A)			
Motor Size(kW/P)		5.5/4	
Heating System Of Wash		Hot Water Supply & Electric	Hot Water Supply & Steam
Heating System Of The Dryer		Gas	Steam
Connection Port(in.) Pressure(MPa)	Cold Water Supply	1NPT(0.1 - 0.3)	Rc1(0.1 - 0.3)
	Hot Water Supply	1NPT(0.1 - 0.3)	Rc1(0.1 - 0.3)
	Detergent Cup Water	1/2NPT(0.1 - 0.3)	Rc1/2(0.1 - 0.3)
	Water Drain	2•1/2NPT	G2•1/2
	Dryer Gas (LPG/LNG)	1/2NPT(2.75kPa)/ 1/2NPT(1.13kPa)	-
	Heating Steam (Supply/Drain)	-	Rc1/2(0.5 - 0.7)/ Rc3/8(0.5 - 0.7)
	Dryer Steam (Supply/Drain)	-	Rc1/2(0.5 - 0.7)/ Rc1/2(0.5 - 0.7)
	Duct Diameter	Ø 200mm	
Water Level (L)		40 - 224	40 - 224
Gas Consumption (MJ/h)		100.3	-
Steam Consumption (kg/H)		-	45
Machine Dimensions (mm)(W × D × H)		1145 × 1446 × 1958	1145 × 1449 × 1980
Weight (kg)		1140	1140
Soap Cups (psc)		2	
Chemical Injection Ports psc (Max. psc)		8(8)	8(8)
Chemical Injection Pump psc (Max. psc)		◎1(8)	◎1(8)
Drum Gap Guard		◎	◎

*◎ = Optional

External view

AWDA035 Gas

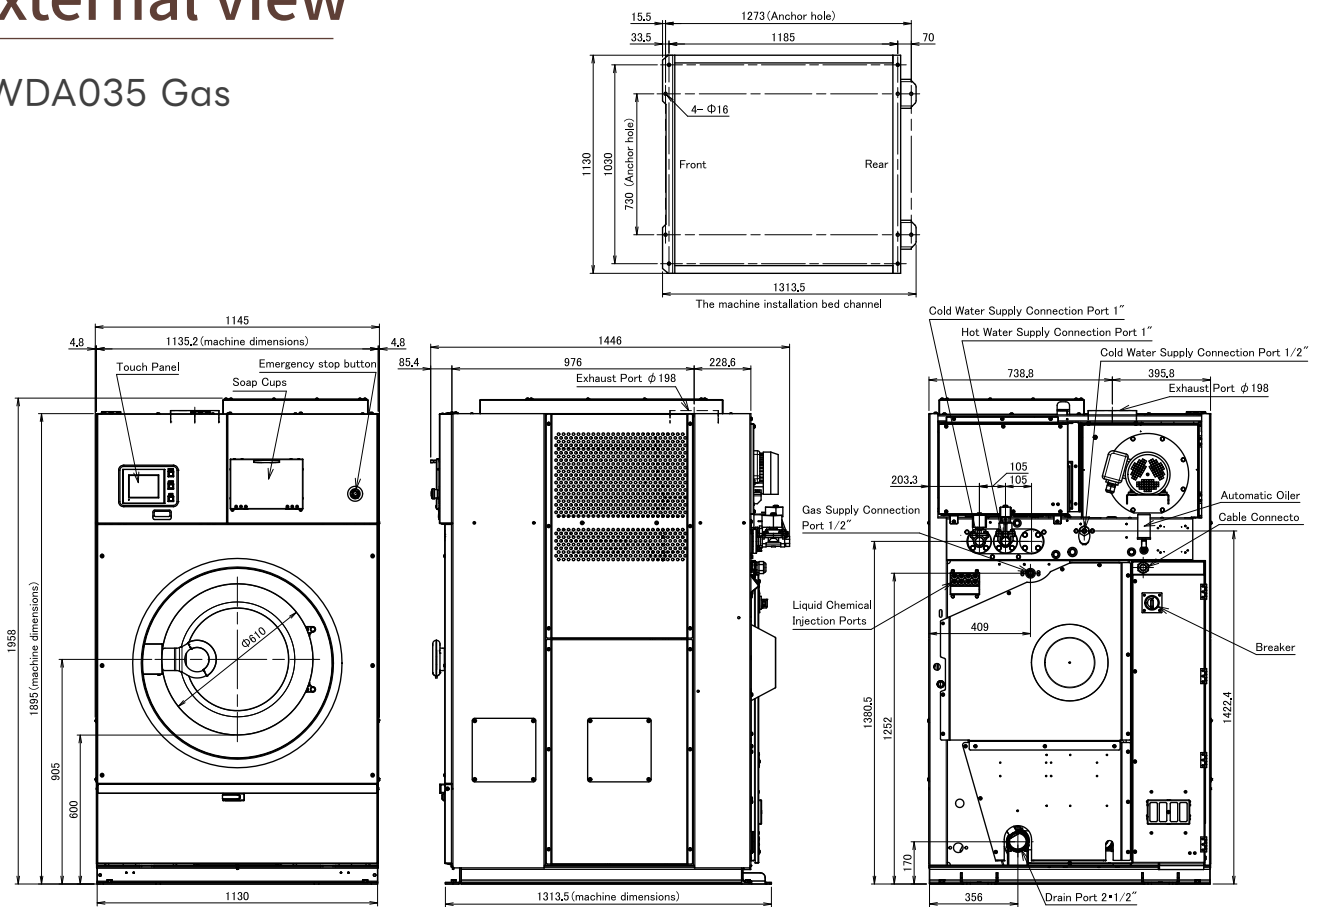

AWDA035 Steam

