SPECIFICATIONS

		AWDG040E	AWDG060E	AWDG080E
Wash/Dry Capacity - lb		40 / 20	60 / 30	80 / 40
Cylinder Volume - cu. ft.		6	9.6	12.4
Cylinder Diameter - in		26	30	35
Cylinder Depth - in		19.7	23.6	22.3
Extraction - rpm		900	880	800
G-Factor		298	330	318
Electrical Requirements		208-230V / 60Hz /1 Ph		
Circuit Breaker - A		15	30	30
Motor - HP	Drum	3	5	7.5
	Fan	0.5	0.5	1
Water Inlet - in	Cold/Hot	$^3/_4$ GHT		
	Detergent Flush	$^3/_4$ GHT		
Water Pressure - psi		14.5-43.5		
Drain - in		$2^1/_2$ NPT		
Gas Inlet - in		$^1/_2$ NPT		
Gas Pressure - psi	Natural Gas	0.18-0.38		
	Liquid Propane	0.36-0.47		
Gas Consumption - CFH		22.1	35.3	41.2
Exhaust Diameter - in		8		
Exhaust Airflow - CFM		377.9	674.5	709.8
Machine Dimensions - in (W×D×H)		34.0 × 47.4 × 70.6	39.7 × 55.3 × 70.6	45.0 × 58.5 × 75.5
Shipping Dimensions - in (W×D×H)		43.3 × 51.6 × 78.0	49.2 × 57.9 × 78.0	53.5 × 63.0 × 83.1
Net Weight - lb		1,433	1,929	2,414
Shipping Weight - lb		1,521	2,028	2,535

Product Features

- Inverter Motor
- Auto-Dosing
- Auto Door Lock
- Auto-Reverse Tumble
- Stainless Steel Drum
- Unbalanced Load Detection
- Overheat Protection
- Post-Dry Cooldown
- Drum Cleaning Cycle
- Mold-Resistant Drum
- Electronic Coin Acceptor
- Programmable Detergent Pricing
- Stainless Steel Panel
- Anti-Wrinkle Protection
- 10.4-inch Touchscreen
- Water Temperature Selection
- Drying Temperature Selection
- Cycle Selections：
  Wash & Dry / Wash Only / Dry Only
- Auto-Dosing Selections：
  Detergent On/Off, Softener On/Off

TAKUROX

Cleanchain Corporation
18 Technology Drive, Suite 130, Irvine, CA 92618
www.cleanchain-global.com

2026.11

A BETTER EXPERIENCE, BY DESIGN

With TAKUROX, customers load dry, dirty laundry and take it out clean and dry, with washing and drying completed in one machine. No more lifting and transferring heavy, wet laundry from a washer to a dryer. Every wash & dry cycle finishes with drying, helping remove residual moisture from the drum and door seal for a fresher machine. And because the entire process happens in one continuous cycle, customers can step away instead of waiting or coming back to transfer their laundry. It gives customers their time back.



No Moisture.
No Mold. No Odor

Wash & Dry.
Done in One Cycle

Give Customers
Their Time Back

MORE LAUNDRY. LESS SPACE

Imagine replacing 5 washers and 5 dryers with 5 TAKUROX machines, completing the entire cycle in the same drum, from wash to dry. By significantly reducing the equipment footprint, you can operate in a smaller location and lower your rent, one of the biggest ongoing costs of running a laundromat. Or, use the space you save to add more machines, increase capacity, or simply create a more spacious and comfortable environment for your customers.

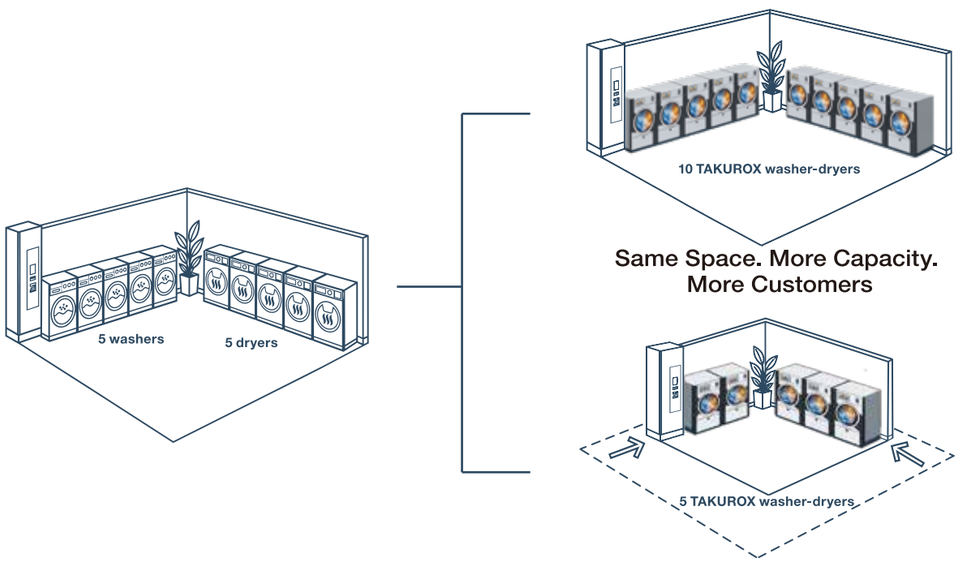

Same Space. More Capacity.
More Customers

Same Capacity.
Less Space. Lower Rent

MORE VALUE. MORE REVENUE

TAKUROX turns washing and drying into one complete, convenient service, giving customers greater value with every cycle. The added convenience creates an opportunity to offer a premium wash-and-dry service at a higher price point, while encouraging customers who previously used only a washer or dryer to choose the complete service. More value per cycle and greater adoption of wash-and-dry can translate into higher revenue from the same customer traffic.

① Higher Revenue Per Wash & Dry Cycle

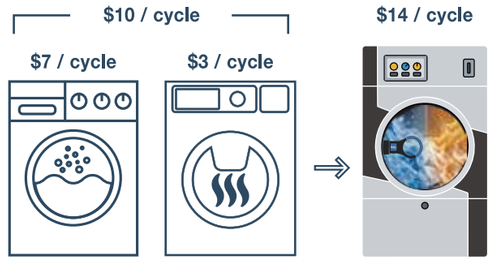

Separate Washer and Dryer

TAKUROX All-in-One

+40%*
Revenue per cycle

② More Customers Choose Wash & Dry

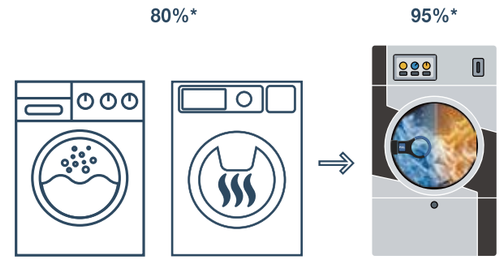

Separate Washer and Dryer

TAKUROX All-in-One

+15%*
of customers complete the full cycle

*Revenue figures and percentages are for illustrative purposes only. Actual results may vary.

LOWER COST. LONGER LIFE

From installation to long-term operation, TAKUROX is designed to help reduce the total cost of running your laundromat. Its soft-mount design simplifies installation and eliminates the need for costly foundation work. High extraction efficiency removes more water before drying, reducing the time and energy needed to dry each load. TAKUROX is also backed by a commitment to long-term parts availability, so machines can be repaired and kept in service for years instead of being replaced simply because parts are no longer available. Lower installation costs, lower energy use, and a longer service life mean a lower lifetime cost for your business.

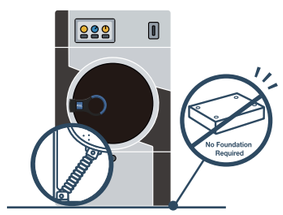

Soft-Mount Design
Save time and money on installation

High G-Force
More moisture removed
Lower energy costs



Made In Japan
Quality you can trust



Lower Lifetime Cost
Long-term parts availability
Longer machine life

TAKUROX

A NEW ERA FOR THE LAUNDROMAT

ALL-IN-ONE WASHER & DRYER

Time for a better machine

A BETTER EXPERIENCE, BY DESIGN

With TAKUROX, customers load dry, dirty laundry and take it out clean and dry, with washing and drying completed in one machine. No more lifting and transferring heavy, wet laundry from a washer to a dryer. Every wash & dry cycle finishes with drying, helping remove residual moisture from the drum and door seal for a fresher machine. And because the entire process happens in one continuous cycle, customers can step away instead of waiting or coming back to transfer their laundry. It gives customers their time back.



No Moisture.
No Mold. No Odor

1-Step



Wash & Dry.
Done in One Cycle

Give Customers
Their Time Back

MORE LAUNDRY. LESS SPACE

Imagine replacing 5 washers and 5 dryers with 5 TAKUROX machines, completing the entire cycle in the same drum, from wash to dry. By significantly reducing the equipment footprint, you can operate in a smaller location and lower your rent, one of the biggest ongoing costs of running a laundromat. Or, use the space you save to add more machines, increase capacity, or simply create a more spacious and comfortable environment for your customers.

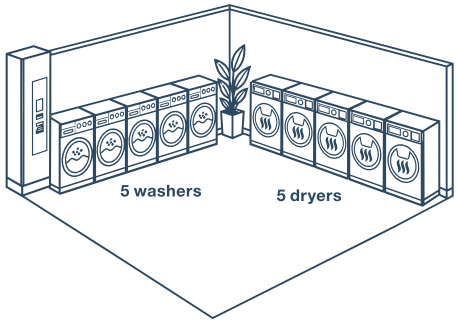

Same Space. More Capacity.
More Customers

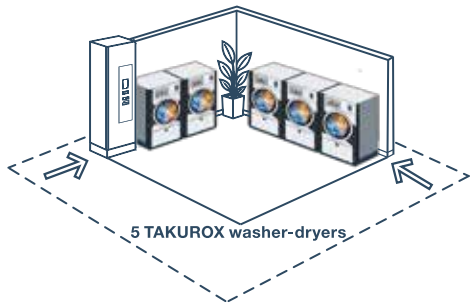

Same Capacity.
Less Space. Lower Rent

MORE VALUE. MORE REVENUE

TAKUROX turns washing and drying into one complete, convenient service, giving customers greater value with every cycle. The added convenience creates an opportunity to offer a premium wash-and-dry service at a higher price point, while encouraging customers who previously used only a washer or dryer to choose the complete service. More value per cycle and greater adoption of wash-and-dry can translate into higher revenue from the same customer traffic.

① Higher Revenue Per Wash & Dry Cycle

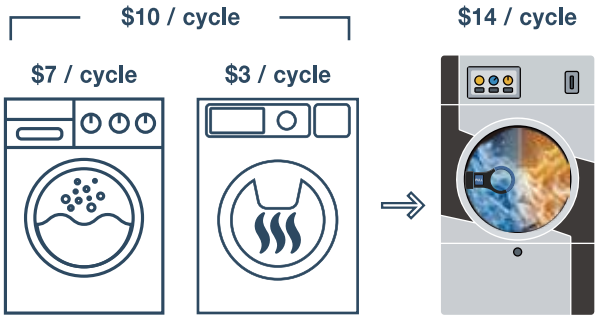

Separate Washer and Dryer

TAKUROX All-in-One

+40%*

Revenue per cycle

② More Customers Choose Wash & Dry

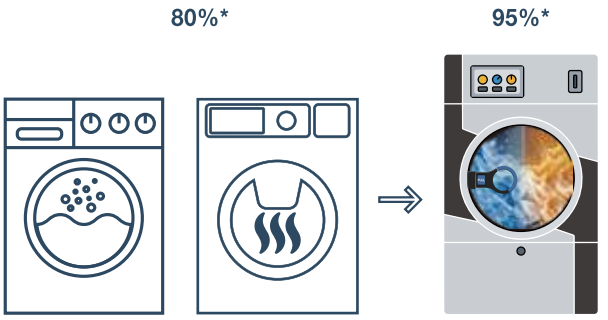

Separate Washer and Dryer

TAKUROX All-in-One

+15%*

of customers complete the full cycle

*Revenue figures and percentages are for illustrative purposes only. Actual results may vary.

LOWER COST. LONGER LIFE

From installation to long-term operation, TAKUROX is designed to help reduce the total cost of running your laundromat. Its soft-mount design simplifies installation and eliminates the need for costly foundation work. High extraction efficiency removes more water before drying, reducing the time and energy needed to dry each load. TAKUROX is also backed by a commitment to long-term parts availability, so machines can be repaired and kept in service for years instead of being replaced simply because parts are no longer available. Lower installation costs, lower energy use, and a longer service life mean a lower lifetime cost for your business.



Soft-Mount Design

Save time and money on installation

High G-Force

More moisture removed
Lower energy costs



Made In Japan

Quality you can trust



Lower Lifetime Cost

Long-term parts availability
Longer machine life

SEE WHAT TAKUROX CAN DO FOR YOU

SPECIFICATIONS

		AWDG040E	AWDG060E	AWDG080E
Wash/Dry Capacity - lb		40 / 20	60 / 30	80 / 40
Cylinder Volume - cu. ft.		6	9.6	12.4
Cylinder Diameter - in		26	30	35
Cylinder Depth - in		19.7	23.6	22.3
Extraction - rpm		900	880	800
G-Factor		298	330	318
Electrical Requirements		208-230V / 60Hz /1 Ph		
Circuit Breaker - A		15	30	30
Motor - HP	Drum	3	5	7.5
	Fan	0.5	0.5	1
Water Inlet - in	Cold/Hot	3/4 GHT		
	Detergent Flush	3/4 GHT		
Water Pressure - psi		14.5-43.5		
Drain - in		2 1/2 NPT		
Gas Inlet - in		1/2 NPT		
Gas Pressure - psi	Natural Gas	0.18-0.38		
	Liquid Propane	0.36-0.47		
Gas Consumption - CFH		22.1	35.3	41.2
Exhaust Diameter - in		8		
Exhaust Airflow - CFM		377.9	674.5	709.8
Machine Dimensions - in (W×D×H)		34.0 × 47.4 × 70.6	39.7 × 55.3 × 70.6	45.0 × 58.5 × 75.5
Shipping Dimensions - in (W×D×H)		43.3 × 51.6 × 78.0	49.2 × 57.9 × 78.0	53.5 × 63.0 × 83.1
Net Weight - lb		1,433	1,929	2,414
Shipping Weight - lb		1,521	2,028	2,535

Product Features

- Inverter Motor
- Auto-Dosing
- Auto Door Lock
- Auto-Reverse Tumble
- Stainless Steel Drum
- Unbalanced Load Detection
- Overheat Protection
- Post-Dry Cooldown
- Drum Cleaning Cycle
- Mold-Resistant Drum
- Electronic Coin Acceptor
- Programmable Detergent Pricing
- Stainless Steel Panel
- Anti-Wrinkle Protection
- 10.4-inch Touchscreen
- Water Temperature Selection
- Drying Temperature Selection
- Cycle Selections :
  Wash & Dry / Wash Only / Dry Only
- Auto-Dosing Selections :
  Detergent On/Off, Softener On/Off

TAKUROX

Cleanchain Corporation
18 Technology Drive, Suite 130, Irvine, CA 92618
www.cleanchain-global.com

2026.11