Soft-Mount Washer-Extractors AWNG150

Model No.		AWNG150
Load Capacity Guide	Bed Sheet (Single)	63
	Lab Coat / Uniform	125
	Shirt	227
	Pajamas	104
	Washcloth	2500
	Blanket	17
Capacity (lb)		150
Control Interface		Touchscreen Panel
Drum Dimensions		Ø 44.9" × 24.4"
Drum Speed	Wash (rpm)	20-40
	Extract (rpm)	240-720
Electrical Requirement OCPD Rating (A)	208-230V / 50-60Hz / 1PH	-
	208-230V / 50-60Hz / 3PH	60
	460V / 50-60Hz / 3PH	30
Motor Size (HP)		20
Water Inlet Connection (in) Inlet Water Pressure (psi)	Cold	2 NPT (15-45 PSI)
	Hot	2 NPT (15-45 PSI)
	Chemical	3/4 GHT (15-45 PSI)
	Drain	4 NPT
	Steam (optional)	1 NPT (58-87)
	Compressed Air (optional)	3/8 O.D. (100-145)
Water Comsumption (gal)		14.5 - 109.4
Machine Dimensions (in)(W × D × H)		64.4 × 68.1 × 74.6
Weight (lb)		4630
Dispenser Cup		3
Optional Chemical Injection Ports		◎ 0-8
Optional Drum Gap Guard		◎
Optional Water Reclamation System		◎

● = Standard ◎ = Optional

External view

AWNG150

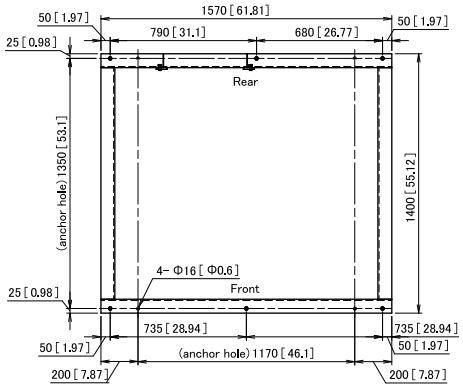
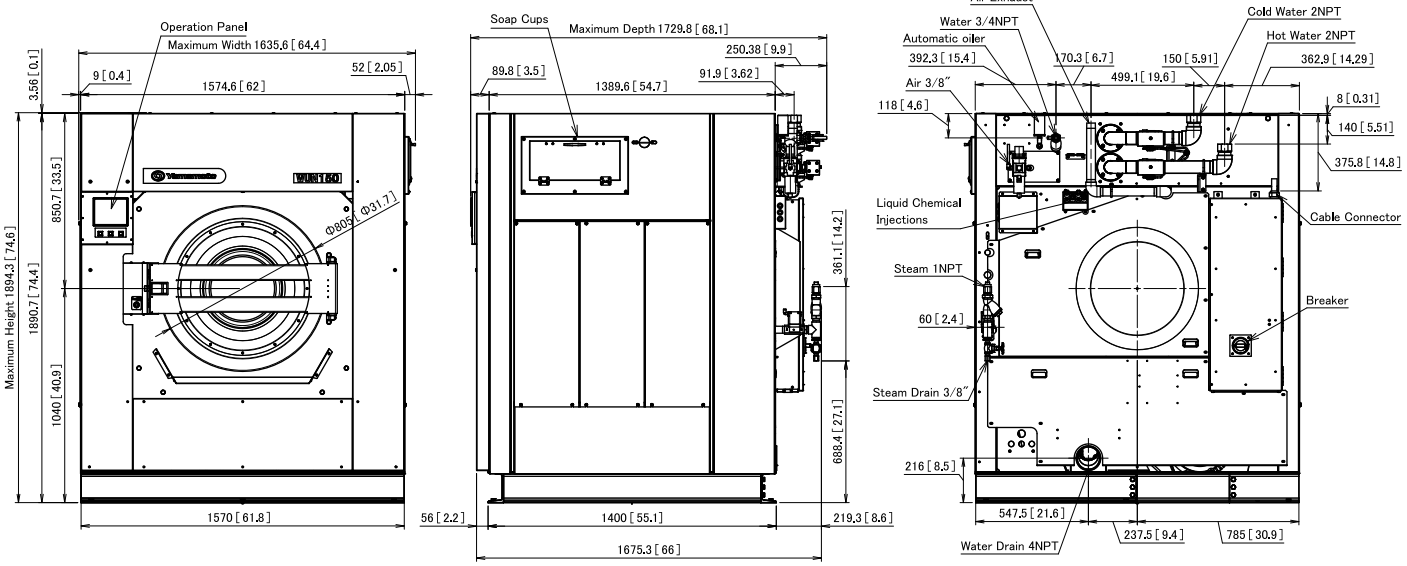
The machine installation bed channel