Soft-Mount Washer-Extractors AWNU028

Model No.		AWNU028	
Load Capacity Guide	Bed Sheet (Single)	26	
	Lab Coat / Uniform	53	
	Shirt	95	
	Pajamas	44	
	Washcloth	1050	
	Blanket	7	
Capacity(kg)		28	
Control Interface		Touchscreen	
Electric Heater		-	V
Heater Size(kW)		-	20
Drum Dimension(mm)		890 Ø × 461mm	890 Ø × 461mm
Drum Speed	Wash (rpm)	20 - 50	20 - 50
	Extract (rpm)	100 - 800	100 - 800
Electrical Requirement OCPD Rating (A)	AC380-415V/50-60Hz/3Ph	15	50
Motor Size(kW/P)/(HP)		5.5 / 4 /(7.5)	5.5 / 4 / (7.5)
Connection Port(in.) Pressure(MPa)	Cold Water Supply	1(0.1 - 0.3)	1(0.1 - 0.3)
	Hot Water Supply	1(0.1 - 0.3)	1(0.1 - 0.3)
	Detergent Cup Water	1/2(0.1 - 0.3)	1/2(0.1 - 0.3)
	Water Drain	2•1/2	2•1/2
	Steam	1/2(0.4 - 0.6)	-
	Compressed-Air	-	-
Water Level (L)		36 - 199	36 - 199
Machine Dimensions (mm)(W × D × H)		1143 × 1255 × 1714	1143 × 1255 × 1714
Weight(kg)		850	850
Detergent Cup (psc)		2	2
Chemical Injection Ports psc (Max. psc)		6(6)	6(6)
Chemical Injection Pump psc (Max. psc)		◎0(8)	◎0(8)
Drum Gap Guard		◎	◎
Water Reclamation System		◎	◎

*◎ = Optional

External view
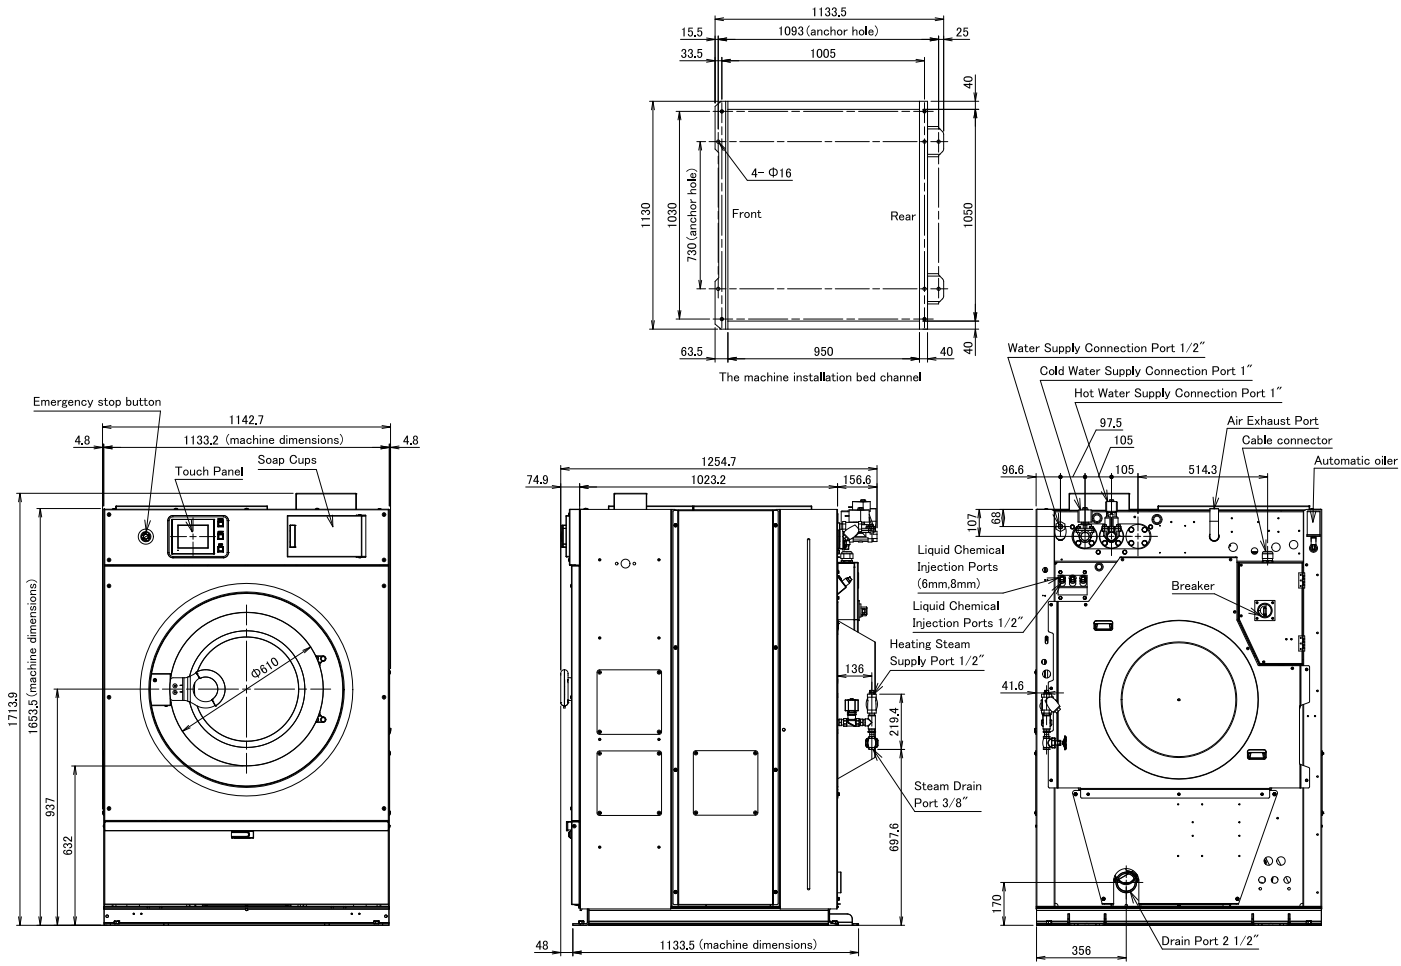
AWNU028