

Soft-Mount Washer-Extractors AWNS028




Model No.		AWNS028
Load Capacity Guide	Bed Sheet (Single)	26
	Lab Coat / Uniform	53
	Shirt	95
	Pajamas	44
	Washcloth	1050
	Blanket	7
Capacity(kg)		28
Control Interface		Touchscreen
Drum Dimensions		890 Ø × 461mm
Drum Speed	Wash (rpm)	20 - 50
	Extract (rpm)	100 - 800
Electrical Requirement OCPD Rating (A)	AC380-415V/50-60Hz/3Ph	15
Motor Size(kW/P)		5.5/4
Connection Port(in.) Pressure(MPa)	Cold Water Supply	RC1(0.1 - 0.3)
	Hot Water Supply	RC1(0.1 - 0.3)
	Detergent Cup Water	RC1/2(0.1 - 0.3)
	Water Drain	G2•1/2
	Steam	◎RC1/2(0.4- 0.6)
	Compressed-Air	-
Water Level (L)		34 - 189
Machine Dimensions (mm)		1144 × 1257 × 1713
Weight(kg)		850
Detergent Cup (psc)		2
Chemical Injection Ports psc (Max. psc)		8(8)
Chemical Injection Pump psc (Max. psc)		◎0(8)
Drum Gap Guard		◎
Water Reclamation System		◎

*◎ = Optional

External view

AWNS028

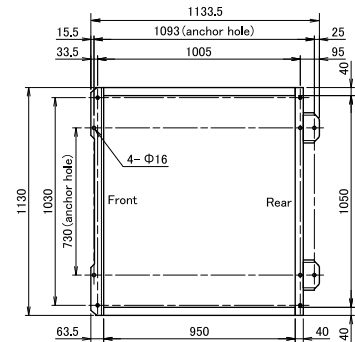

The machine installation bed channel

