

Washer-dryer combo AWDG060



Gas




Steam

Model No.		AWDG060	
Load Capacity Guide	Bed Sheet (Single)	14	
	Lab Coat / Uniform	28	
	Shirt	50	
	Pajamas	23	
	Washcloth	550	
	Blanket	4	
Capacity (lb)Washer / Dryer		60/30	60/30
Control Interface		Touchscreen	Touchscreen
Drum Dimensions		Ø30.0" × 23.6"	Ø30.0" × 23.6"
Drum Speed	Wash (rpm)	20/50	
	Extract (rpm)	100/880	
Electrical Requirement OCPD Rating (A)	208-230V / 60Hz / 3PH	30	30
Motor Size (HP)		5	
Hot Water Supply		External	External / Steam
Drying Heating Supply		Gas	Steam
Water Inlet Connection (in) Inlet Water Pressure (psi)	Cold	3/4 NPT (15-45)	
	Hot	3/4 NPT (15-45)	
	Chemical	3/4 NPT (15-45)	
	Drain	2-1/2 NPT	
Gas Inlet Connection (in) Inlet Gas Pressure (psi)	LPG	1/2 NPT (0.36-0.47)	-
	LNG	1/2 NPT (0.18-0.38)	
Wash Steam Connection (in) Wash Steam Pressure (psi)	Wash Inlet	-	1/2 NPT (73-102)
	Wash Outlet		3/8 NPT (73-102)
Drying Stem Connection (in) Drying Steam Pressure (psi)	Drying Inlet	-	1/2 NPT (73-102)
	Drying Outlet		1/2 NPT (73-102)
Exhaust Duct Connection (in)	Duct Diameter	8"	
Water Consumption (gal)		6-49	6-49
Gas Consumption (LNG)		73,100 BTU/hr	-
Steam Consumption (lb/hr)		-	77
Machine Dimensions (in)(W × D × H)		39.7 × 55.1 × 72.8	39.7 × 55.1 × 73.5
Weight (lb)		1965	1965
Dispenser Cup		2	
Chemical Injection Ports (max)		◎ 0 (8)	◎ 0 (8)
Drum Gap Guard		◎	◎

● = Standard ◎ = Optional

External view

AWDG060 Gas

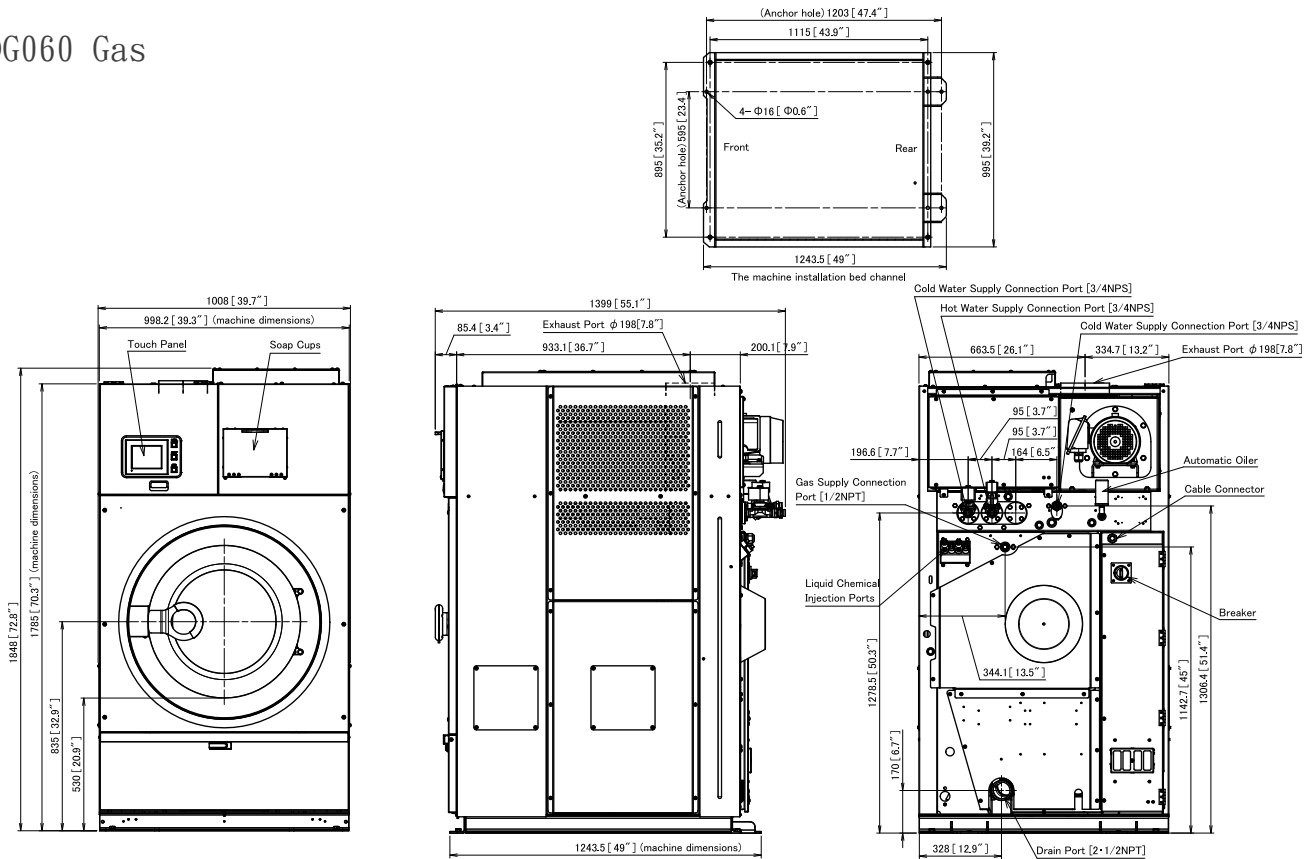

AWDG060 Steam

