Washer-dryer combo AWDG080

Gas

Steam

Model No.		AWDG080	
Load Capacity Guide	Bed Sheet (Single)	18	
	Lab Coat / Uniform	35	
	Shirt	64	
	Pajamas	29	
	Washcloth	700	
	Blanket	5	
Capacity (lb)Washer / Dryer		80/40	80/40
Control Interface		Touchscreen	Touchscreen
Drum Dimensions		Ø35.0" × 22.3"	Ø35.0" × 22.3"
Drum Speed	Wash (rpm)	20/50	
	Extract (rpm)	100/800	
Electrical Requirement OCPD Rating (A)	208-230V / 60Hz / 3PH	30	30
Motor Size (HP)		7.5	
Hot Water Supply		External	External / Steam
Drying Heating Supply		Gas	Steam
Water Inlet Connection (in) Inlet Water Pressure (psi)	Cold	3/4 NPT (15-45)	
	Hot	3/4 NPT (15-45)	
	Chemical	3/4 NPT (15-45)	
	Drain	2-1/2 NPT	
Gas Inlet Connection (in) Inlet Gas Pressure (psi)	LPG LNG	1/2 NPT (0.36-0.47) 1/2 NPT (0.18-0.38)	-
Wash Steam Connection (in) Wash Steam Pressure (psi)	Wash Inlet Wash Outlet	-	1/2 NPT (73-102) 3/8 NPT (73-102)
Drying Stem Connection (in) Drying Steam Pressure (psi)	Drying Inlet Drying Outlet	-	1/2 NPT (73-102) 1/2 NPT (73-102)
Exhaust Duct Connection (in)	Duct Diameter	8"	
Water Consumption (gal)		11-59	11-59
Gas Consumption (LNG)		77,000 BTU/hr	-
Steam Consumption (lb/hr)		-	100
Machine Dimensions (in)(W × D × H)		45.1 × 58.6 × 77.1	45.1 × 58.3 × 77.9
Weight (lb)		2515	2515
Dispenser Cup		2	
Chemical Injection Ports (max)		◎ 0 (8)	◎ 0 (8)
Drum Gap Guard		◎	◎

● = Standard ◎ = Optional

External view

AWDG080 Gas

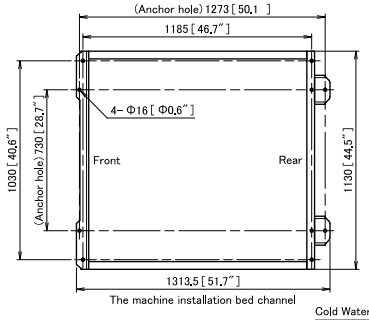

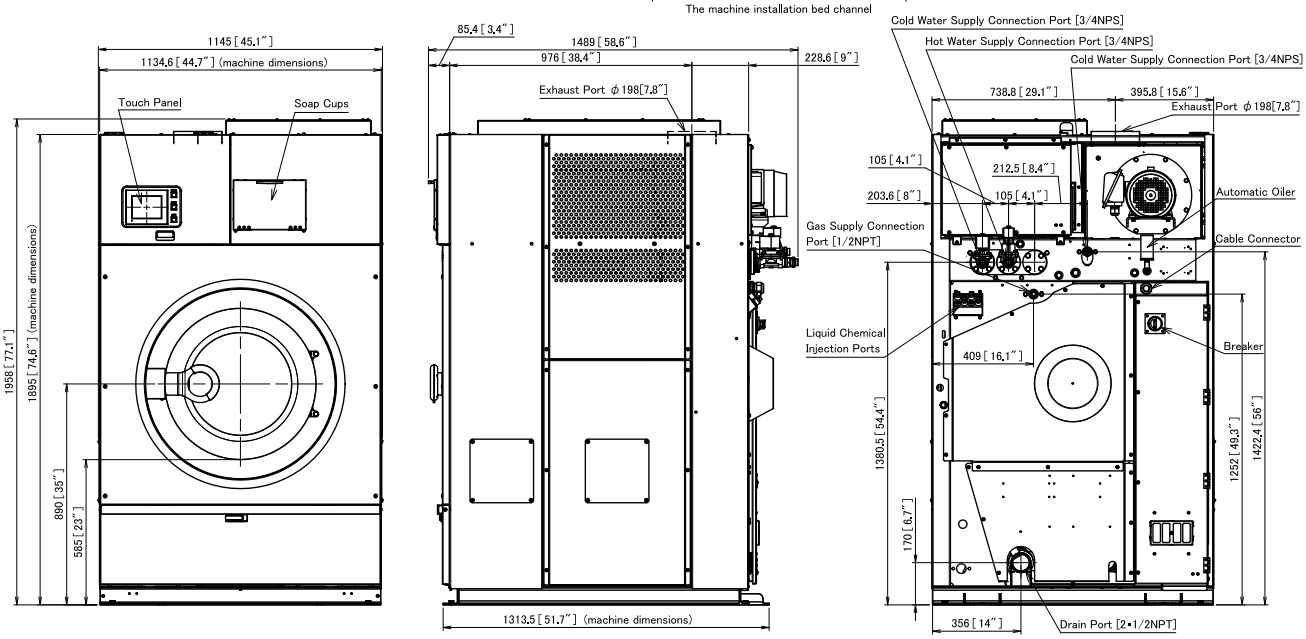
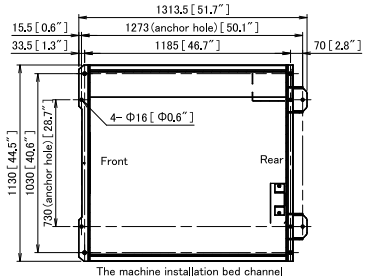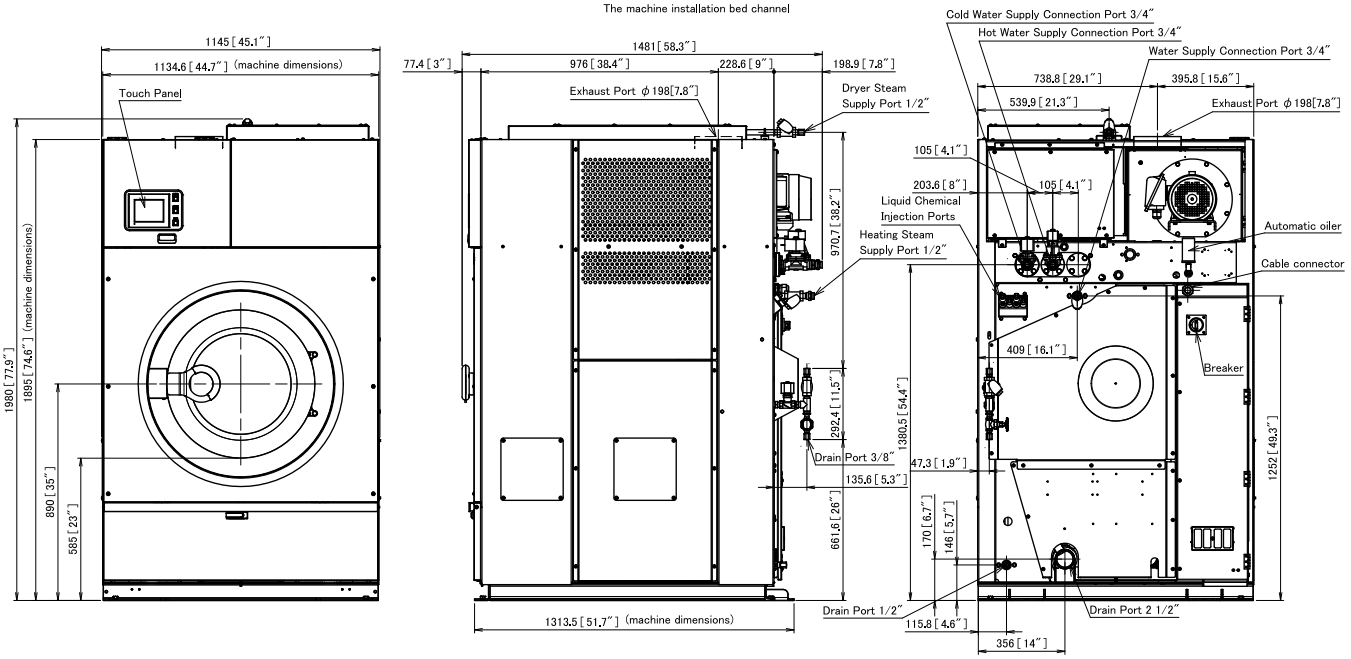
AWDG080 Steam